





Horus Vision, P.O. Box 616, Lewiston ID 83501 □ 866-568-2926 □ [www.HorusVision.com](http://www.HorusVision.com)  
Copyright 2018 Horus Vision. All rights reserved. Written consent of Horus Vision required to copy or use any of the material in this document.


### LOW MAGNIFICATION VIEW

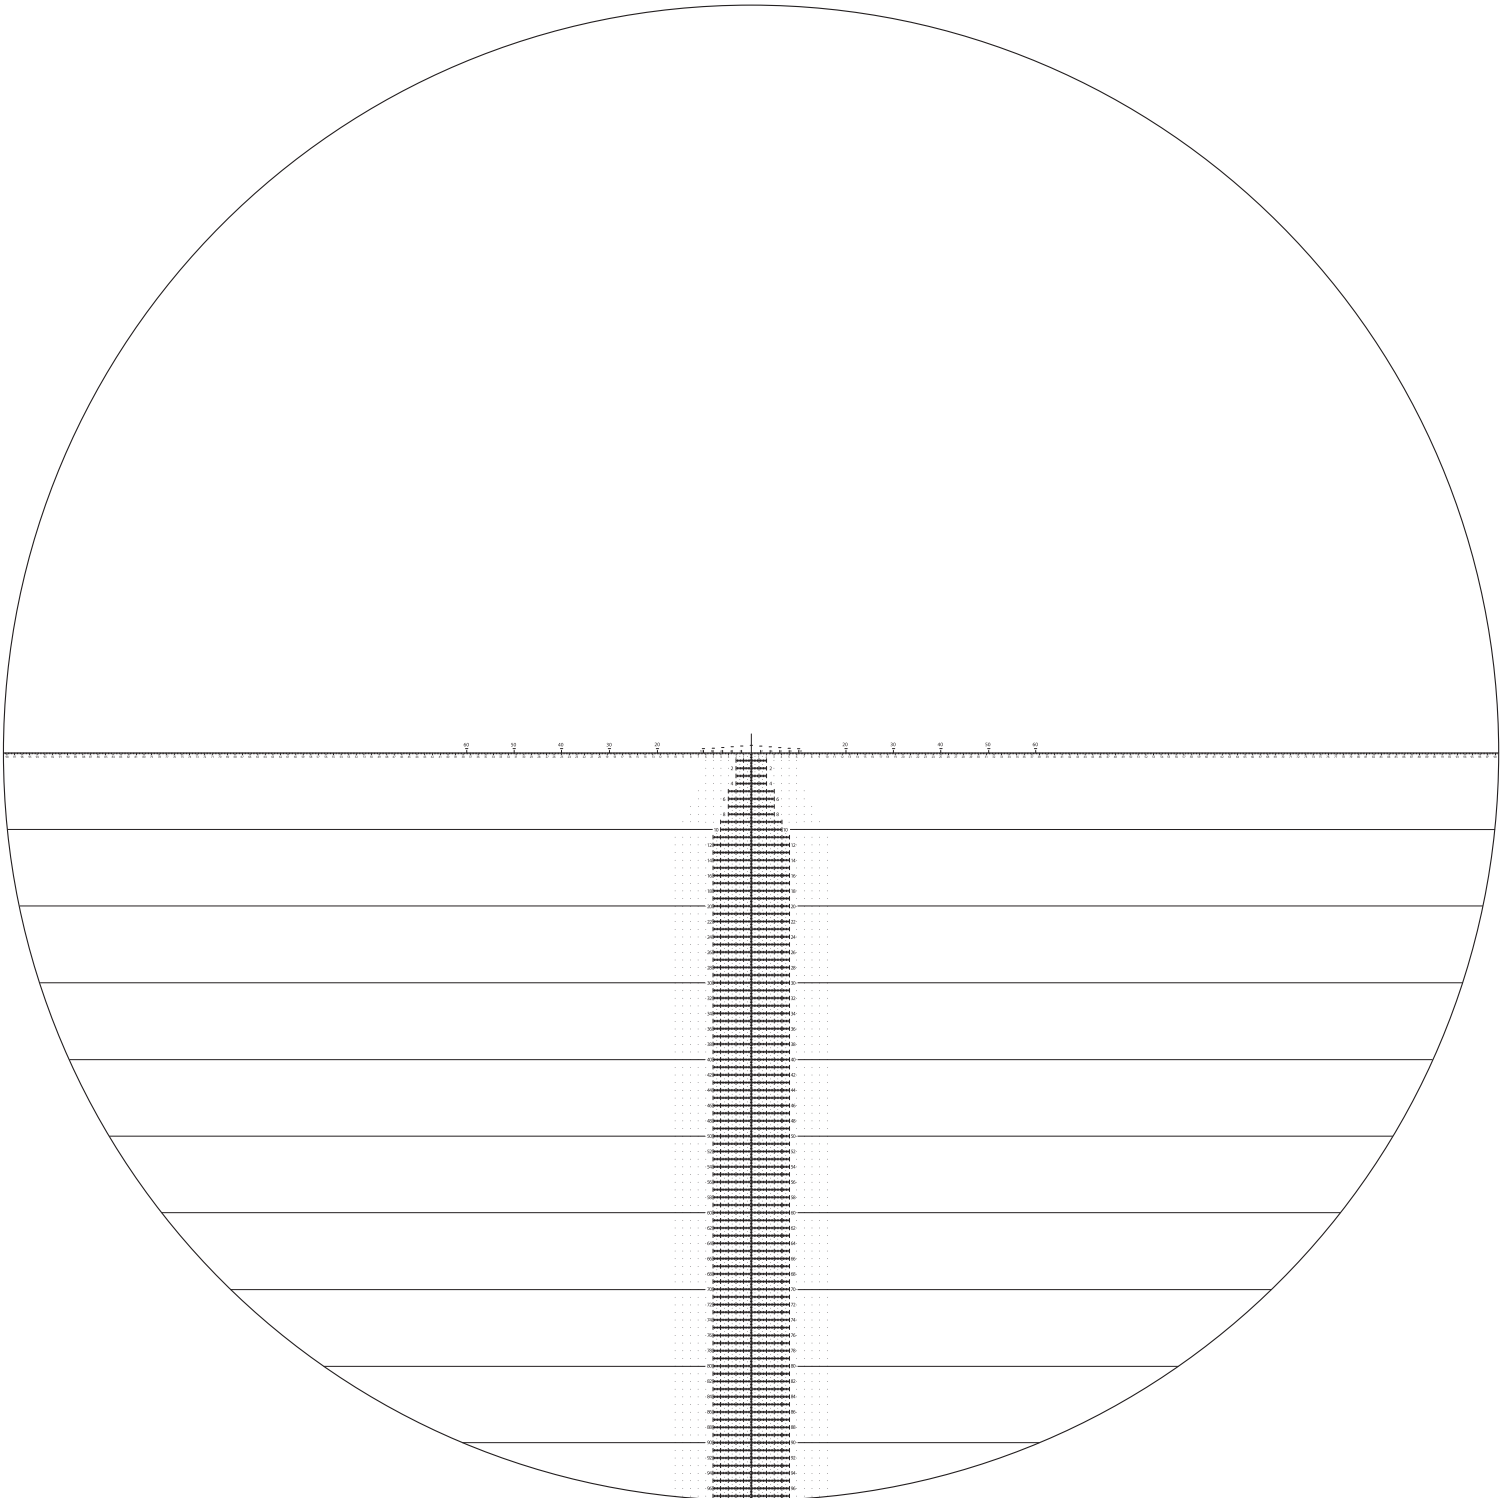


### HIGH MAGNIFICATION VIEW

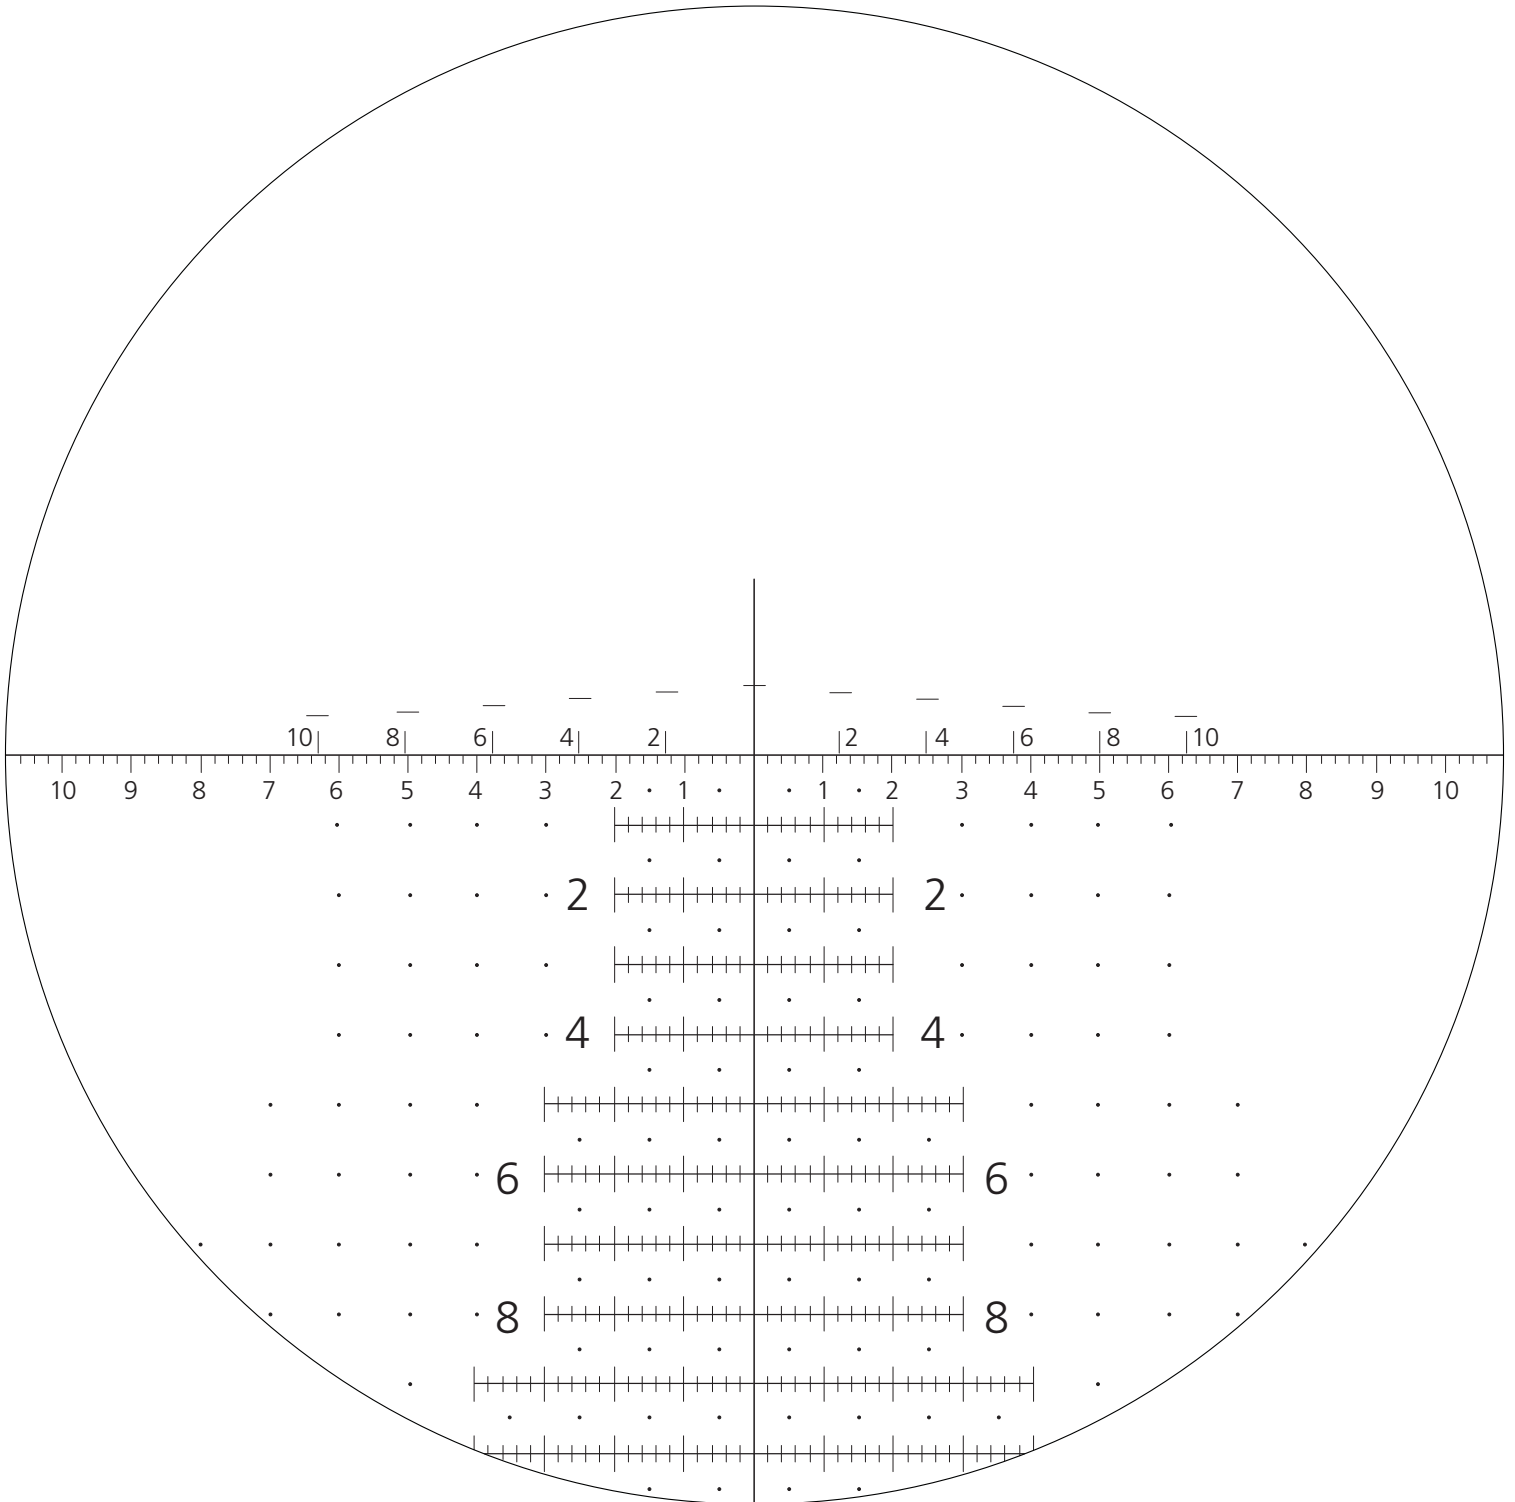

### SPECIFICATIONS

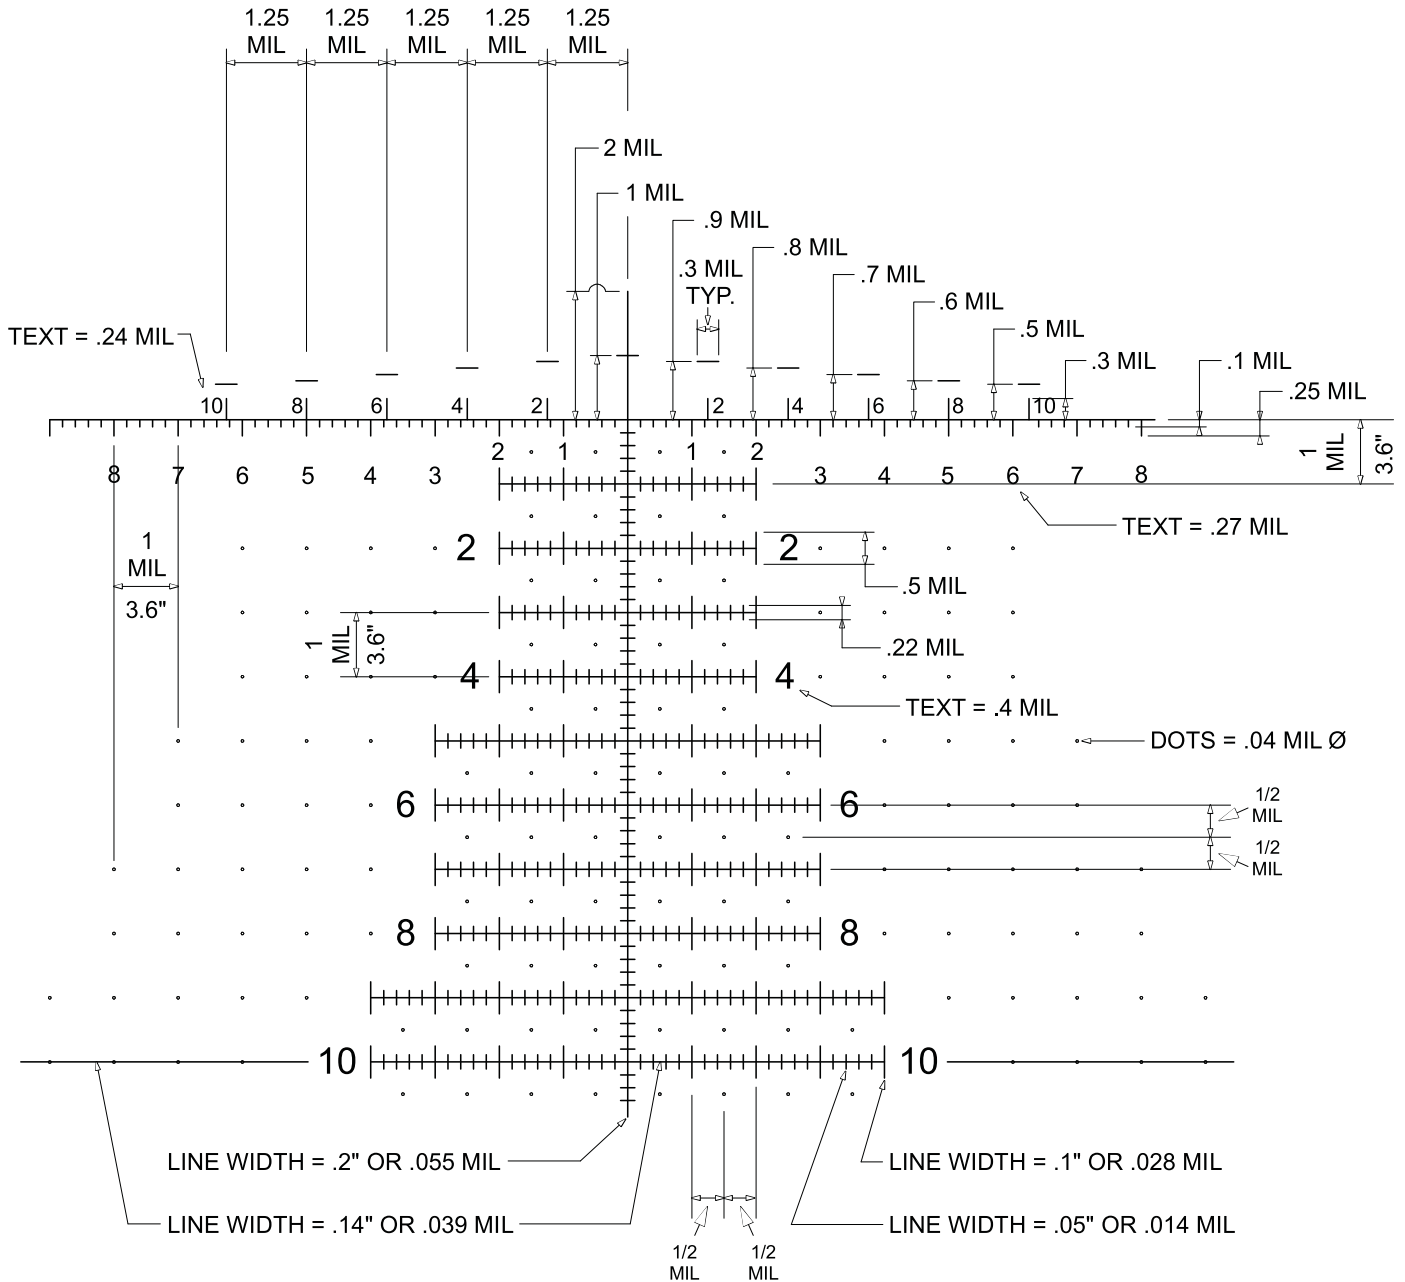

### ILLUMINATION PATTERN

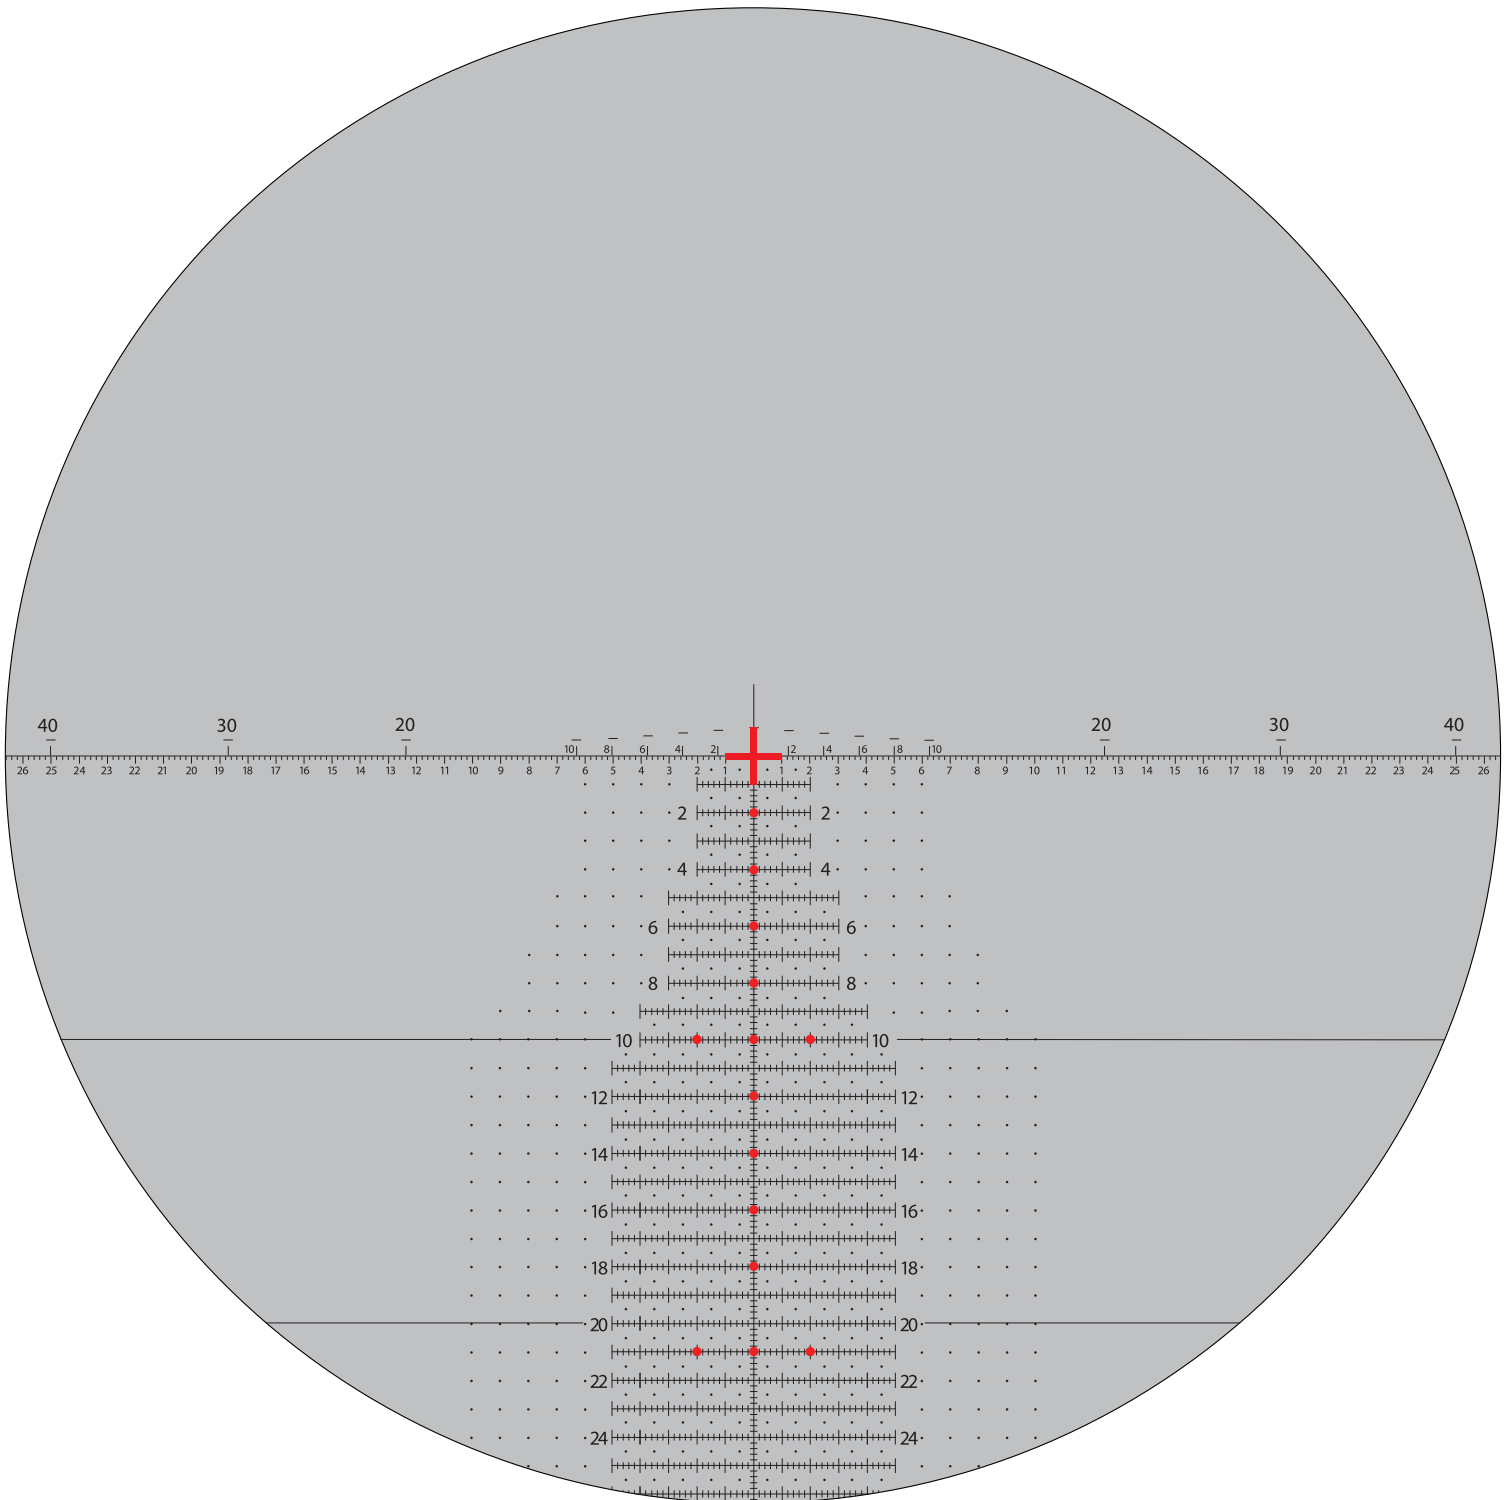

## KEY FEATURES

- For speed shooting out to 600 meters using patented Horus Rapid Range Bars.
- Moving target holds located on the main horizontal crosshair.
- Holdover dots to extend wind and elevation hold points beyond the Horus™ Grid while maintaining a clear uncluttered view.
- The H58 reticle offers illumination for twilight and lowlight conditions.
- The Horus Grid lets you visually place the target on the appropriate horizontal and vertical grid lines to correct for elevation and windage visually without turning knobs or counting clicks.
- Secondary horizontal lines allow precise elevation holds. The standard spacing between the secondary horizontal lines is exactly 1 mil.
- To compensate for wind, drift, speed of target, etc.: each secondary horizontal stadia line is calibrated with “large hash marks” spaced exactly 1 mil apart; between each of the large hash marks, there are smaller evenly spaced hash marks that are exactly 0.2 mils apart.
- The Horus Grid allows you to quickly and accurately make a Second Shot Correction if your first shot misses.

## KEY FACTS

- Speed Shooting range: from 0 to 600 meters.
- Horus Grid range: from 0 to extreme long range.
- Mil based / metric range finding accurate to within 0.2 mil.
- Central targeting grid calibrated in USMC mils (6283 mils/circle) (1 mil = 3.60 inches at 100 yards) (10cm at 100 meters).
- Precise calibration of measurements to within less than 0.5%.